


SIGMA - your fitting choice



S - Range
Couplings

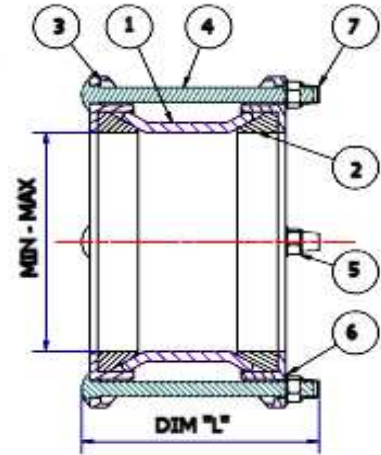

Suitable for tied restraint without modification

S Range - DIMENSIONS						
MODEL No.	DN	MIN O/D	MAX O/D	DIM "L"	No. BOLTS & SIZE	WGT (kg)
SF-50-1	50	60	66	115	2 X M12	3
SF-80-1	80	89	98	200	4 X M12	5
SF-100-1	100	108	118	200	4 X M12	6
SF-150-1	150	159	170	200	4 X M12	7
SF-200-1	200	219	225	200	6 X M12	12
SF-250-1	250	273	280	200	6 X M12	14
SF-300-1	300	315	326	200	6 X M12	16

Materials & Coatings

S Range COUPLINGS - Parts List				
ITEM	QTY	DESCRIPTION	MATERIAL	SPECIFICATION
1	1	BODY CASTING	420/12 CAST S.G. IRON	WRAS APPROVED POWDER COATED
2	2	GASKET	EPDM ELASTOMER	WRAS APPROVED MATERIAL
3	2	END RING CASTING	420/12 CAST S.G. IRON	WRAS APPROVED POWDER COATED
4	4	M12 ADJUSTING BOLT	GRADE 8.8 STEEL	ZINC PLATED & BLACK PLASCOAT 80 MIC
5	4	HEXAGON NUT	ST. STEEL GRADE A4	NATURAL FINISH
6	4	WASHER	ST. STEEL GRADE A4	NATURAL FINISH
7	4	THREAD CAP	NYLON MOULDING	NATURAL FINISH